

Mahindra Compact Round Baler

- ▶ *High Productivity (t/h)*
- ▶ *Adjustable Bale Density*
- ▶ *Suitable for Paddy Crop*




AB 1050 | AB 1000

Mahindra Round Balers are tractor operated balers that effectively compress cut straw into round bales. Suitable for use in small acreage farms, these balers deliver excellent operational efficiency and reduce manual effort.

Key Features ■


Self-lubrication & Cleaning System

No need to stop machine for lubrication leading to longer productive working hours.

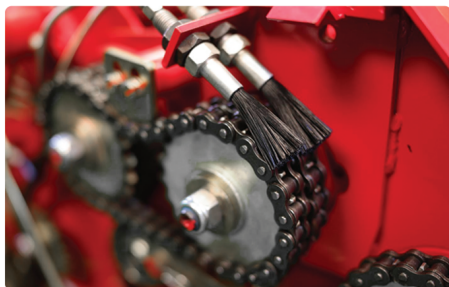

Adjustable Bale Density

Saves on time and effort and time required to measure and keep bale density same ensuring faster speed of operations.

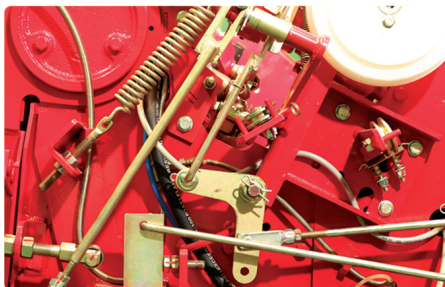

Spring Loaded Bale Ramp

Easily rolls the finished bale from machine eliminating manual effort and increasing operational efficiency.




Manual or Electronic Bale Counter

Easily keeps track of bales produced eliminating possible counting errors.



Shear Bolt as Safety Feature

Shear bolt breaks and halts machine when overloaded protecting the machine from major breakdowns.

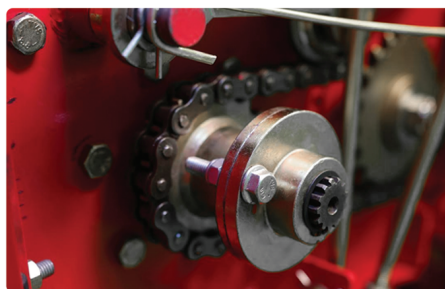

Technical Specifications ■

| Specification | Mahindra AB 1050 | Mahindra AB 1000 |
|----------------------------|--------------------------|--------------------------|
| Bale Length [mm] | 1050 | 930 |
| Bale Diameter [mm] | 610 | 610 |
| Bale Weight [kg] | 18 - 25 | 25 - 30 |
| Binding Twine | Jute Twine | Jute Twine |
| Pickup Width [mm] | 1175 | 1060 |
| Bale Chamber Width [mm] | 1050 | 930 |
| Efficiency | 60 - 80 bales/h | 40 - 50 bales/h |
| Tractor Power Range | 26 - 33 kW (35 - 45 HP) | 26 - 33 kW (35 - 45 HP) |
| PTO speed [r/min] | 540 | 540 |
| Dimension - L x W x H [mm] | 1740 X 1450 X 1250 | 1550 X 1450 X 1250 |
| Weight [kg] | 610 | 625 |
| Hitching | Cat - II 3 Point Linkage | Cat - II 3 Point Linkage |



Access to Spares



Access to Service



Attractive Finance Schemes



1 Year Warranty*

*from purchase